

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)


PCT

(10) International Publication Number
WO 2005/059435 A1

- (51) International Patent Classification⁷: **F21V 21/04**, 29/02, F24F 13/078
- (74) Agent: **PATRADE A/S**; Fredens Torv 3A, DK-8000 Aarhus C (DK).
- (21) International Application Number: **PCT/DK2004/000567**
- (22) International Filing Date: 26 August 2004 (26.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2003 01863 16 December 2003 (16.12.2003) DK
- (71) Applicant (for all designated States except US): **DAXTOR ApS** [DK/DK]; Brorsonsvej 5, DK-8600 Silkeborg (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DAHL, Torben** [DK/DK]; Brorsonsvej 5, DK-8600 Silkeborg (DK).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: INSERT WITH VENTILATION

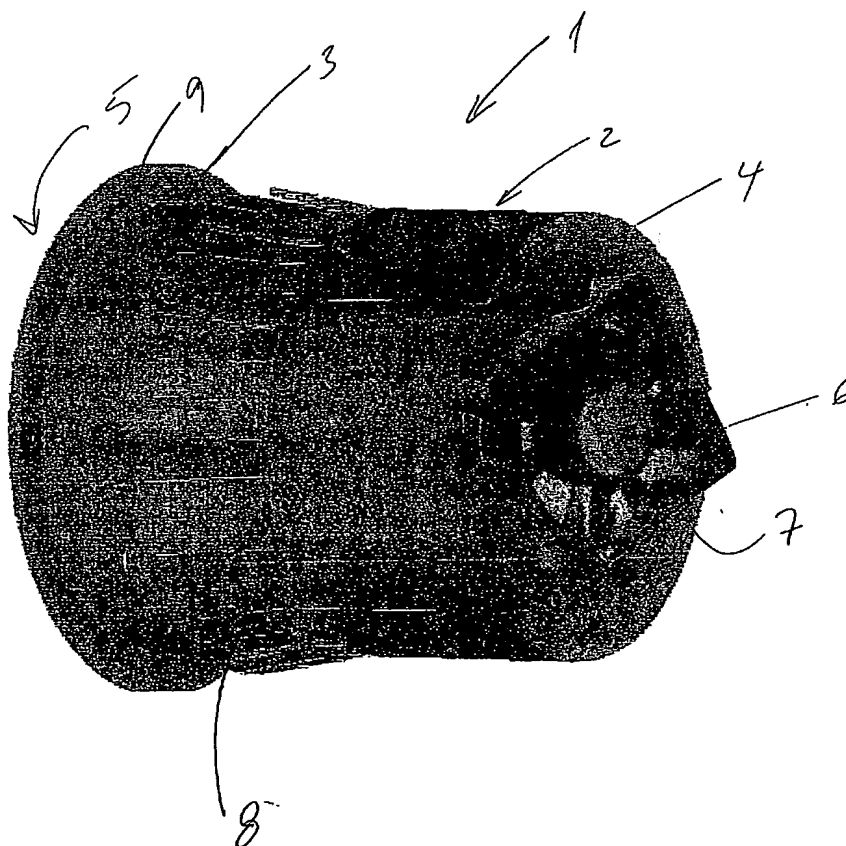

(57) Abstract: It is an object of the present invention to provide an insert (1) suitable for being placed in a wall, ceiling or other element wherein an electrical installation means such as a lamp socket or the like may be fitted. Ventilation means (6) are provided inside the insert (1) such that air current may be created and further that the air current may be led past the electrical installation (15), such that the overall heat accumulation inside the device may be drastically reduced.

WO 2005/059435 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report